


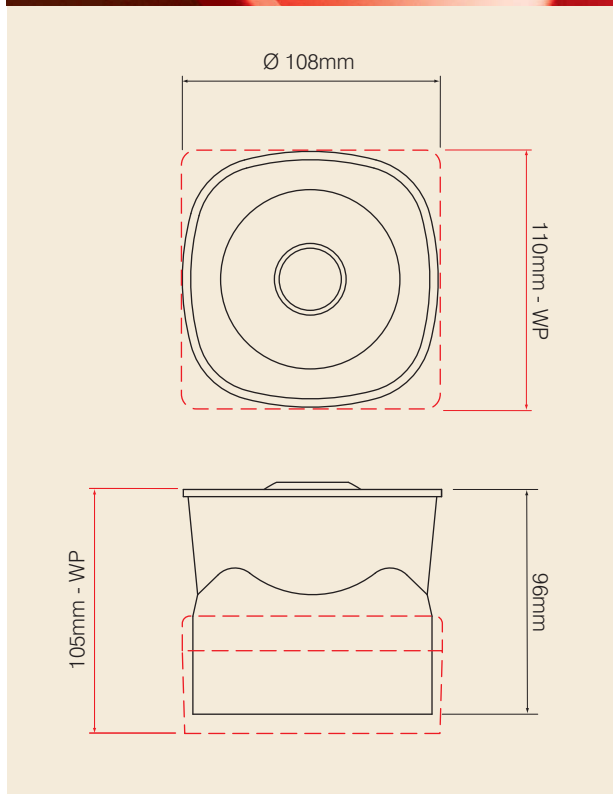

Specification

Voltage	12 - 30Vdc
Current	5mA
Sound Output	100dB(A)
Tones	3
Volume Control	20dB
Monitoring	Reverse polarity
Temperature	- 10°C to + 55°C - 25°C to + 70°C (WP)
Protection	IP21C IP66 (WP)
Construction	ABS
Weight	0.21Kg 0.32Kg (WP)
Colours	Red or white

Symphoni

ULTRA LOW CURRENT SOUNDER

Symphoni sounders are extremely efficient wall sounders that complement the Squashni Micro base sounder. Like the Squashni Micro there is a standard version providing UK alarm tones and an "E" version that has tones including the German DIN tone and the Netherlands Slow Whoop.

- HIGH OUTPUT
- ULTRA LOW CURRENT
- AUTOMATIC SYNCHRONISATION
- VOLUME CONTROL
- LOCKING BASE
- WP VERSION SUITABLE FOR OUTDOOR USE