




AV VERSION

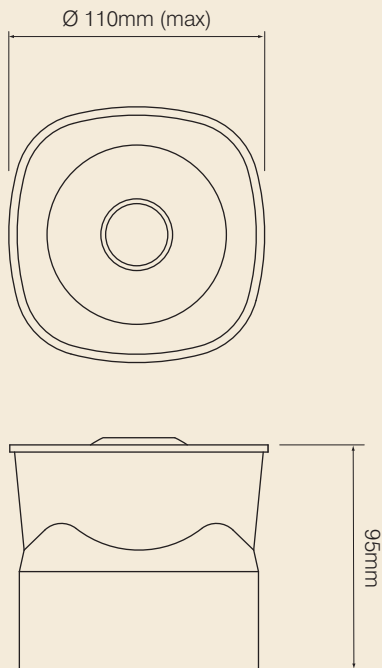

Specification

Voltage	Operates only with Fulleon 2 wire protocol
Current	5mA 9mA (AV)
Sound Output	100dB(A)
Tones	3
Light Output	1Hz >2Cd
Volume Control	20dB
Monitoring	As detector circuit
Temperature	- 10°C to + 55°C
Protection	IP21C
Construction	ABS, PC lens
Weight	0.21Kg
Colour	White or red
Lens Colour	Red or clear

Symphoni 2 Wire

2 WIRE SOUNDER AND AV UNIT

The Symphoni 2-Wire allows installation costs to be reduced by using just two cores to operate both sounders and detection devices. Using a Fulleon developed protocol the sounders can be controlled without the requirement for modified detectors or call points. The benefits of the 2-Wire system can be obtained with new systems, but most benefit can be gained during refurbishment where existing cables have to be reused.

- WALL SOUNDER
- ECONOMY FROM 2 - WIRE CIRCUIT SHARED WITH DETECTION
- LOW CURRENT CONSUMPTION
- HIGH OUTPUT
- WORKS WITH STANDARD CONVENTIONAL DETECTORS AND CALL POINTS
- LOCKING BASE